


Notes:


1- All irrigation fittings shall be Sch. 40 PVC unless specified otherwise.

2- All threaded connections from Sch. 40 to Sch. 80 PVC shall be made using teflon tape.


3- Contractor shall settle the area around the bubbler and edge of the root ball so that all irrigation flows through the root ball.

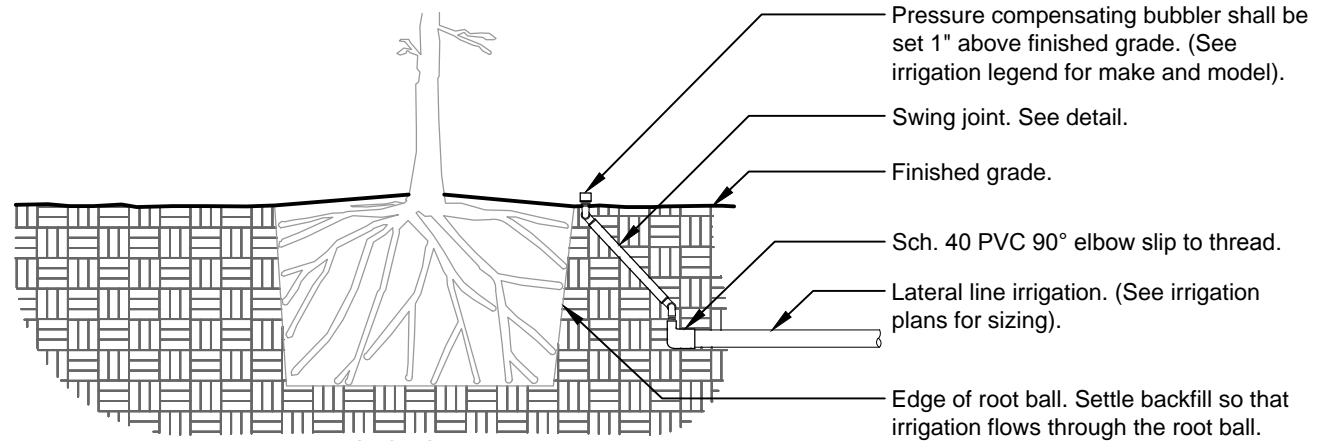

**SECTION VIEW**

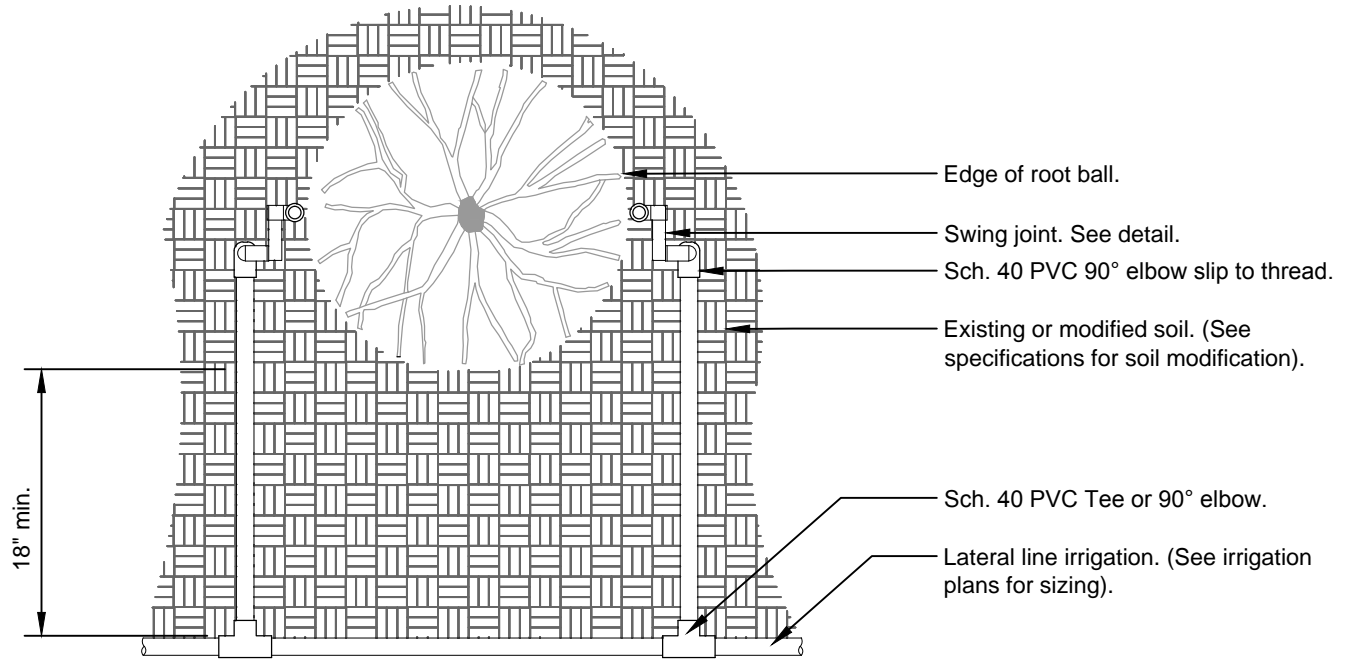

**PLAN VIEW**



# IRRIGATION BUBBLER (2) W/ LAYOUT